



Professional Audio Video Manufacturer

AV Record and Camera Tracking System


PRODUCT DATASHEET




VISSONIC ELECTRONICS LTD.

Think Solutions

Application diagram

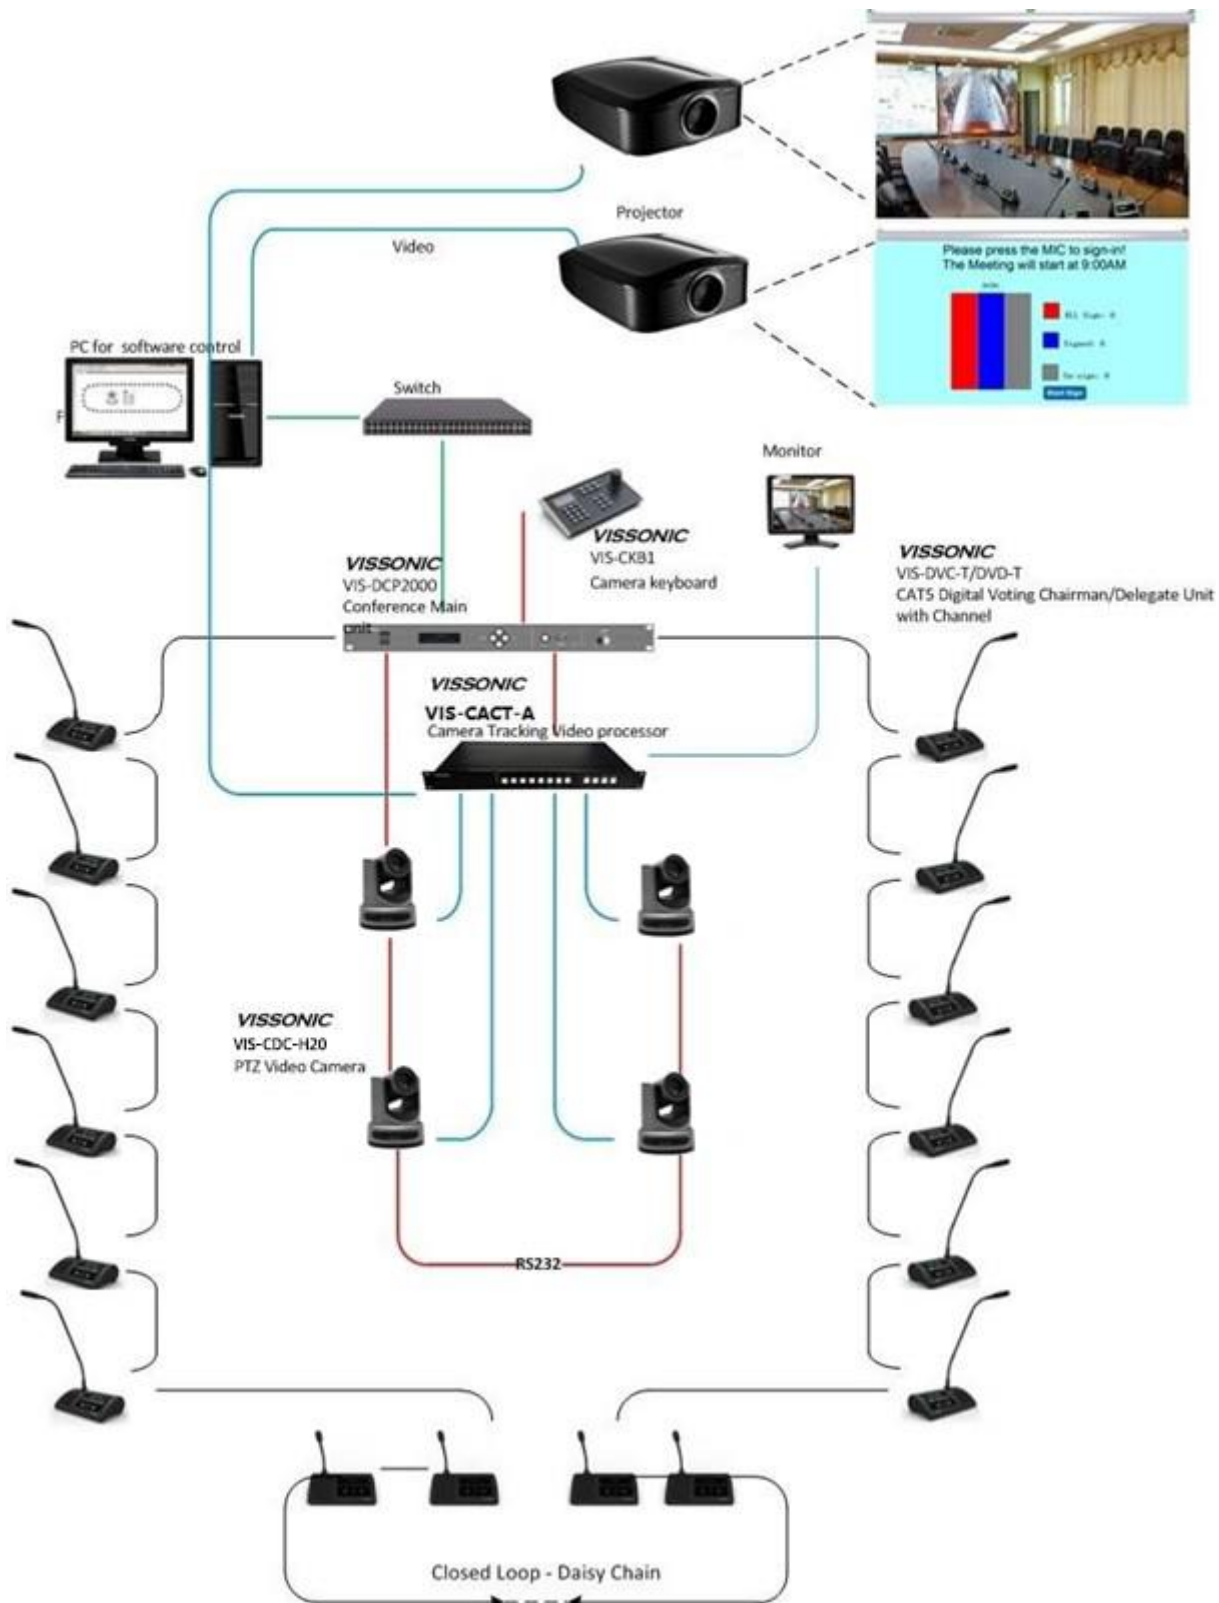

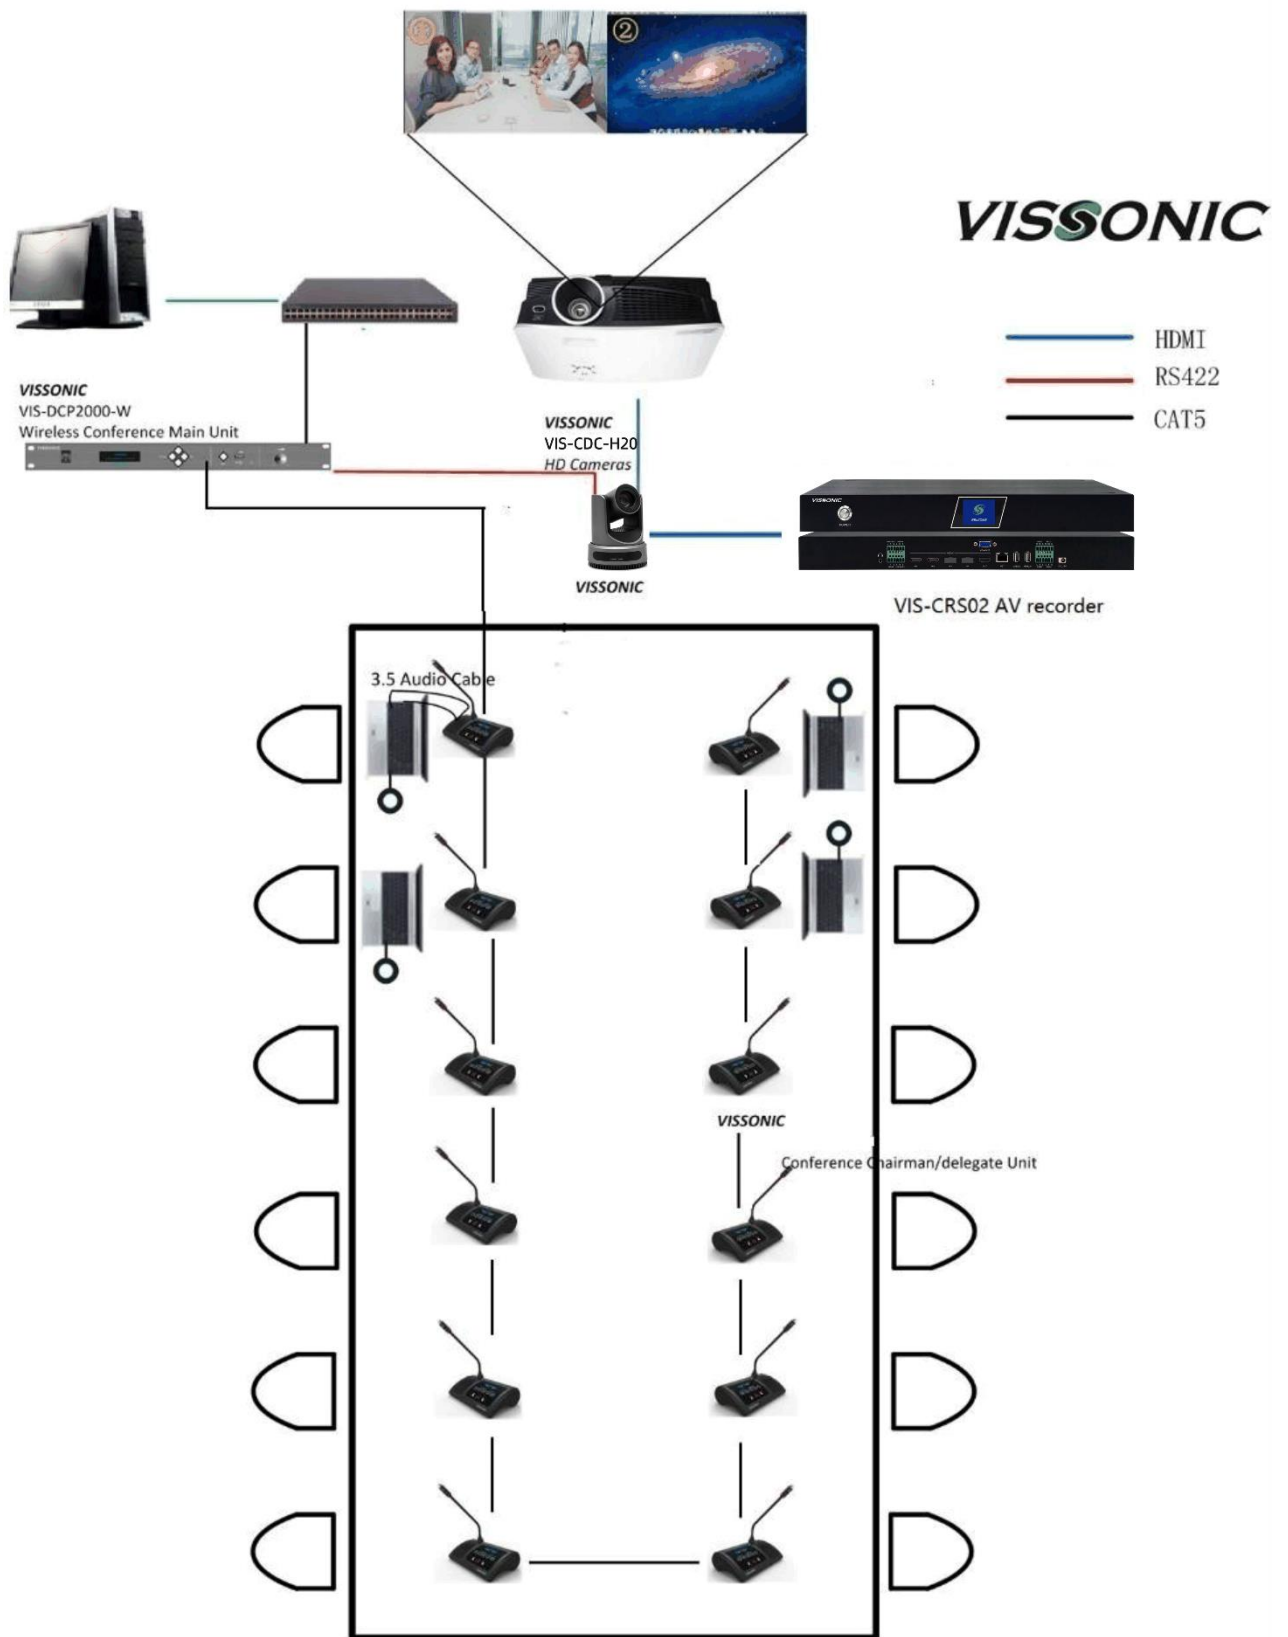

Audio/Video Conference Recording System

VIS-CRS02/03/04-B

Professional AV Recorder and camera tracking



Features

- Compact portable equipment, integrated high-definition video, audio, VGA, USB and other input and output interfaces.
- Support access HD and SD signals, automatic identification signal combined layout pattern of their choice, can be very convenient for video, audio and computer screen simultaneously recording signals and local preview playback.
- Recording and generating common MP4 video files.
- You can use PC manage and control system.
- HDMI, VGA dual output design. HDMI output video conference screen, VGA output directed interface.
- Working with conference controller DCP2000 to get the camera auto-tracking and recording system.
- Live broadcast under LAN or Ethernet.

Control & Indicators

Front panel with display for system information

Interface

- 1 × DC Power socket
- 2/3/4 × HDMI input
- 1 × HDMI output
- 1 × VGA output
- 2 × RS485
- 2 × RS232
- 2 × USB2.0
- 1 × Headphone jack of 3.5mm for monitoring
- 2 × AUDIO LINE IN, 2 × AUDIO LINE OUT
- 1 × RJ45 for Ethernet

Technical Parameter

Control

RS485/RS232: 3 pins 3.8mm phoenix connector

RJ45 connector 100m TCP/IP protocol

Others:

Power supply: DC 12V 3A, adapter

Chassis Specifications: 1U

Size: 482 (L) × 270 (W) × 45 (H) mm

Weight: 2kg

Item Model for Order

VIS-CDC-H20 20x optical zoom, USB3.0, HDMI, SDI, can choose Ceiling Mount or wall mount bracket

VIS-CDC-H30 30x optical zoom, USB3.0, HDMI, SDI, can choose Ceiling Mount or wall mount bracket

VIS-CKB1Camera Control Keyboard (Metal housing, Grey, 3D)

Audio/Video Conference Recording System

VIS-CRS05-B

Professional AV Recorder and camera tracking



Features

- Provide 5 channels of 4K video signal capture and encoding. It can realize 4K resolution from capture, recording to output.
- Up to 5 HDMI inputs and 4 HDMI outputs. HDMI output video conference screen.
- With 2-inch LCD screen, it can display recording and broadcasting status, channel status, network information, storage space and logo, etc.
- Compact portable equipment, integrated high-definition video, audio, USB and other input and output interfaces.
- Support access HD and SD signals, automatic identification signal combined layout pattern of their choice, can be very convenient for video, audio and computer screen simultaneously recording signals and local preview playback.
- Recording and generating common MP4 video files.
- You can use PC manage and control system.
- Working with conference controller DCP2000 to get the camera auto-tracking and recording system.
- Live broadcast under LAN or Ethernet.

Control & Indicators

Front panel with display for system information

Interface

- 1 × DC Power socket
- 5 × HDMI input
- 4 × HDMI output
- 2 × RS485
- 2 × RS232
- 2 × USB2.0, 1 × USB3.0, 1 × USB-OTG
- 1 × Headphone jack of 3.5mm for monitoring
- 2 × AUDIO LINE IN, 2 × AUDIO LINE OUT
- 1 × RJ45 for Ethernet

Technical Parameter

Control

RS485/RS232: 3 pins 3.8mm phoenix connector

RJ45 connector 100m TCP/IP protocol

Others:

Power supply: DC 12V 3A, adapter

Chassis Specifications: 1U

Size: 482 (L) × 270 (W) × 45 (H) mm

Weight: 2kg

Item Model for Order

VIS-CDC-H20 20x optical zoom, USB3.0, HDMI, SDI, can choose Ceiling Mount or wall mount bracket

VIS-CDC-H30 30x optical zoom, USB3.0, HDMI, SDI, can choose Ceiling Mount or wall mount bracket

VIS-CKB1Camera Control Keyboard (Metal housing, Grey, 3D)

VIS-CATC-A

Camera Auto-tracking Controller



Features

- 2 HDMI+ 4 HD/3G SDI input, 1+1 HDMI output.
- 6x1+1 seamless scaler switcher, maximum supported output resolution is 1080P@60Hz
- Seamless switching, no jitter, no blank screen.
- Adjustable image freezing function
- Web control function

Functions:

- Turn on/off the channel number indicators
- 6x1 seamless scaler switcher, maximum supported output resolution is 1080P@60Hz,
- Seamless switching, no jitter, no blank screen.
- Adjustable image freezing function (freezing time from 1 to 6 seconds, freezing time cannot be less than 0.5 second or freezing function would be turned off).
- RS232 and Ethernet port to work with central controller or CLEACON series or CLASSIC-D series conference main unit for camera auto-tracking function.

Interfaces

2x HDMI input

4x SDI input

2x HDMI-A

1x female DP9 and 1x male DP9

1xRJ45 for Ethernet

Technical Parameters

Video Input

Signal format/QuantityHDMIx2

Connector HDMI-A connectors

Pixel bandwidth 165MHz

Protocol..... HDMI 1.3a standard, HDCP1.3 protocol, DVI1.0 protocol

Support resolution 1280x720@50Hz;1280x720@60Hz;
1920x1080@25Hz; 1920x1080@30Hz; 1920x1080@50Hz;1920x1080@60Hz

Transmission distance..... less than 35m.

Signal format/QuantitySDIx4

Connector BNC female connectors

Pixel bandwidth 165MHz

Video format.....Mbps SDI, 1.485Gbps HD-SDI and 2.97Gbps 3G-SDI

Support resolution 1280x720@50Hz;1280x720@60Hz;
1920x1080@25Hz; 1920x1080@30Hz; 1920x1080@50Hz;1920x1080@60Hz

Transmission distance..... 3G-SDI≤100m with certified SDI professional cable.

Output

Signal format/QuantityHDMIx2

Connector HDMI-A connectors

Pixel bandwidth 165MHz

Support resolution..... 1280x720x50Hz;1280x720x60Hz;

1920x1080x50Hz;1920x1080x25Hz;

1920x1080x30Hz;1920x1080ix50Hz;

1920x1080x60Hz;1920x1080ix60Hz;

Transmission distance..... HDMI≤7m with certified HDMI professional cable.

Control

RS232 control

Ethernet control

Front panel control

Mechanical

Dimensions (mm)483L x 260W x43.6D

Weight 3kg

Colorblack

VIS-CATC-B

Camera Auto-tracking Controller



Features

- 4 HD/3G SDI +2 HDMI input
- 1+1 HDMI output and one USB output.
- 6x1+1 seamless scaler switcher, maximum supported output resolution is 1080P@60Hz
- Seamless switching, no jitter, no blank screen.
- Adjustable image freezing function
- Bridging any high definition HDMI and audio source through USB into video conferencing applications such as Skype for Business, Zoom, Microsoft Teams

Functions:

- Turn on/off the channel number indicators
- Display the speaker's name while showing the tracking image on the large screen
- 6x1 seamless scaler switcher, maximum supported output resolution is 1080P@60Hz
- Seamless switching, no jitter, no blank screen.
- Adjustable image freezing function (freezing time from 1 to 6 seconds, freezing time cannot be less than 0.5 second or freezing function would be turned off).
- RS232 and Ethernet port to work with central controller or CLEACON series or CLASSIC-D series conference main unit for camera auto-tracking function.

Interfaces

1x RCA audio input
 2x HDMI input
 4x SDI input
 2x HDMI-A output
 1xUSB output
 1x female DP9 and 1x male
 DP9 1xRJ45 for Ethernet

Technical Parameters

Audio Input

Signal format/QuantityRCAx1

Video Input

Signal format/QuantityHDMIx2
Connector HDMI-A connectors
Pixel bandwidth 165MHz
Protocol..... HDMI 1.3a standard, HDCP1.3 protocol, DVI1.0 protocol
Support resolution 1280x720@50Hz;1280x720@60Hz;
1920x1080@25Hz; 1920x1080@30Hz; 1920x1080@50Hz;1920x1080@60Hz
Transmission distance..... less than 35m.

Signal format/QuantitySDIx4
Connector BNC female connectors
Pixel bandwidth 165MHz
Video format.....Mbps SDI, 1.485Gbps HD-SDI and 2.97Gbps 3G-SDI
Support resolution 1280x720@50Hz;1280x720@60Hz;
1920x1080@25Hz; 1920x1080@30Hz; 1920x1080@50Hz;1920x1080@60Hz
Transmission distance..... 3G-SDI≤100m with certified SDI professional cable.

Output

Signal format/QuantityHDMIx2
Connector HDMI-A connectors
Pixel bandwidth 165MHz
Support resolution..... 1280x720x50Hz;1280x720x60Hz;
1920x1080x50Hz;1920x1080x25Hz;
1920x1080x30Hz;1920x1080ix50Hz;
1920x1080x60Hz;1920x1080ix60Hz;
Transmission distance..... HDMI≤7m with certified HDMI professional cable.

Signal format/QuantityUSBx1
Interface USB2.0: Type A female jack

Control

RS232 control
Ethernet control
Front panel control

Mechanical

Dimensions (mm)483L x 260W x43.6D
Weight 3kg
Colorblack

VIS-CKB1

Camera Control Keyboard



Features

- Metal Housing, computer keyboard design
- Support PELCO-D, PELCO-P, VISCA Protocols
- Chinese/English LCD, Key-pressing prompting voice available
- With three-dimensional joystick, can control the variable speed of the camera or Pan/Tilt
- Two-dimensional keyboard control, can be accurate to every speed level

Functions

- Can control the camera or pan/tilt rotation, zoom, iris, focus and camera parameter setting
- Can control the camera or pan/tilt preset tour, pattern, absolute position, zoom operation, AUX operation and so on
- The common special function can be selectable
- Real time display the decoder and matrix's working status
- Short circuit protection, automatic recovery program design for communication port
- Multi interface control signals: RS485, RS422, RS232, can control max 256 unit of camera
- Max. communication distance: 1200 M (0.5mm twisted pairs)

Control & Indicators

LCD display

Three-dimensional joystick

Channels selecting buttons

Function shortcut buttons

Interface

1x RJ45 port

1xRS232 DP9 connector

1x 3 pins phoenix connector

Technical Parameters

Communication Mode: RS-485 semi-duplex, RS-422 full-duplex, RS232 full-duplex

Baud Rate:1200/2400/4800/9600 bit/s

Interface: RJ45 network interface, RS232 standard jack, terminal

Voltage: DC12V

Power:5W

Display: LCD

Working Temperature:-10~+50℃

Working Humidity:10~90%(no-condensation)

Weight:1.5kg

Dimension:271(L)x181(W)x54(H)mm

Item Model for Order

VIS-CKB1Camera Control Keyboard

(Metal housing, Grey, 3D)

VIS-CATC-A.....Camera Auto-tracking 4-Windows Processor

VIS-CDC-H20 20x optical zoom, USB3.0, HDMI, SDI, can choose Ceiling

Mount or wall mount bracket

VIS-CDC-H30 30x optical zoom, USB3.0, HDMI, SDI, can choose Ceiling

Mount or wall mount bracket

VIS-CDC-H20/30

FHD PTZ Camera



Features

- H.265 support
H.265 encoding supports conference cameras, and can realize full HD 1080p/60fps video streaming through ultra-low bandwidth.
- 1080P Full HD and NDI®|HX (optional)
Using a new generation of Panasonic's 1/2.8 inch high-quality high-definition CMOS sensor with 2.07 million effective pixels, it can achieve high-quality images with a maximum resolution of 1920x1080.
- Ultra high frame rate
The output frame rate of 1080P is up to 60fps, the output frame rate of 720P is up to 120fps (only supported by the network), and 640x480P can be up to 240fps (only supported by the network, optional).
- AAC audio coding
Supports AAC audio coding, with better sound quality and smaller bandwidth. EQ auto adjustment to reduce noise and support mic input.
- USB3.0 and various ports
USB3.0 ports makes it can work with popular video conference software like teams, zoom. All type of video output ports including HDMI, 3G-SDI. Effective transmission distance up to 150 meters (1080p30 or less). HDMI, SDI, and network can be output simultaneously.
- The low light and high SNR of the CMOS sensor combined with 2D and 3D noise reduction algorithms effectively reduces the noise. Even under low illumination conditions, the picture can still be kept clear and clear.
- 20x Optical + 32x Digital Zoom Use TAMRON high quality super telephoto lens, support 20x optical zoom, and 32x digital, 30x Optical + 16x Digital Zoom (Model VIS-CDC-H30).
- Remote Control
Using RS232/485 interface, all the parameters of the camera can be remote controlled by the high-speed communications. LAN port with VISCA over IP control feature.

Item Model for Order

VIS-CDC-H20 20x optical zoom, USB3.0, HDMI, SDI, can choose Ceiling Mount or wall mount bracket

VIS-CDC-H30 30x optical zoom, USB3.0, HDMI, SDI, can choose Ceiling Mount or wall mount bracket

Specification

| VIS-CDC-H20/ VIS-CDC-H30 | |
|---------------------------|---|
| Video System | HD: 1080p/60, 1080p/50, 1080i/60, 1080i/50, 1080p/30, 1080p/25, 720p/120 (supported by network only), 720p/60, 720p/50, 720p/30, 720p/25, 640x480p/240 (supported by network only, optional) SD: 480i, 576i |
| Sensor | 1/2.8", CMOS, Effective Pixel: 2.07M |
| Scanning Mode | Progressive |
| Lens | 20x, f4.42mm ~ 88.5mm, F1.8 ~ F2.8, or 30x, f4.3mm ~ 129.0mm, F1.8 ~ F2.8 (Model VIS-CDC-H30) |
| Minimal Illumination | 0.5 Lux @ (F1.8, AGC ON) |
| Shutter | 1/30s ~ 1/10000s |
| White Balance | Auto, 3000K/Indoor, 4000K, 5000K/Outdoor, 6500K_1, 6500K_2, 6500K_3, One Push, Manual |
| Backlight Compensation | Support |
| Digital Noise Reduction | 2D&3D Digital Noise Reduction |
| Video S/N | ≥55dB |
| Horizontal Angle of View | 60.7°~ 3.36° |
| Vertical Angle of View | 34.1°~ 1.89° |
| Horizontal Rotation Range | ±170° |
| Vertical Rotation Range | -30°~ +90° |
| Pan Speed Range | 1.7°~ 100°/s |
| Tilt Speed Range | 1.7°~ 69.9°/s |
| H & V Flip | Support |
| Image Freeze | Support |
| Local Storage | Support |
| Number of Preset | 255 |
| Preset Accuracy | 0.1° |
| USB Featured | |
| Operate System | Windows 10 or higher, Windows 7, Windows 8, Mac OS X, Linux |
| Color System | YUV 4:2:2/MJPEG/H.264 |
| Video Format | USB3.0 : 1080p/60, 1080p/50, 1080p/30, 1080p/25, 720p/60, 720p/50, 720p/30, 720p/25 USB2.0 : USB2.0:960x540p/30, 960x540p/25, 640x360p/60, 640x360p/50 |

| | |
|----------------------------------|--|
| USB Video Communication Protocol | UVC 1.0 |
| UVC PTZ | Support |
| IPC Features | |
| Video Compression | H.265/H.264/MJPEG |
| Video Stream | Main Stream, Sub Stream |
| Main Stream Resolution | 1920x1080, 1280x720, 1024x576 |
| Sub Stream Resolution | 720x576, 720x480, 320x240 |
| Video Bit Rate | 128Kbps ~ 8192Kbps |
| Bit Rate Type | Variable Rate, Fixed Rate |
| Frame Rate | 50Hz: 1fps ~ 50fps, 60Hz: 1fps ~ 60fps, 720p120: 120fps, 640x480p240: 240fps |
| Audio Compression | AAC |
| Audio Bit Rate | 96Kbps, 128Kbps, 256Kbps |
| Support protocols | NDI, TCP/IP, HTTP, RTSP, RTMP, Onvif, DHCP, Multicast, etc. |
| Input/Output Interface | |
| HD Output | 1xHDMI: Version 1.3 1x3G-SDI: BNC type, 800mVp-p, 75Ω, Along to SMPTE 424M standard |
| SD Output | 1xCVBS: 3.5mm mini jack, 1Vp-p, 75Ω |
| Network Interface | 1xRJ45: 10M/100M Ethernet Interface |
| Audio Interface | 1-ch: 3.5mm Audio Interface, Line In |
| USB | 1xUSB3.0: Type A female jack |
| Communication Interface | 1xRS232 In: 8pin Min DIN, Max Distance: 30m, Protocol: VISCA/Pelco-D/Pelco-P |
| | 1xRS232 Out: 8pin Min DIN, Max Distance: 30m, Protocol: VISCA network use only |
| | 1xRS485: 2pin Phoenix Port, Max Distance: 1200m, Protocol: VISCA/Pelco-D/Pelco-P |
| Power Jack | JEITA type (DC IN 12V) |
| Generic Specification | |
| Input Voltage | DC 12V |
| Current Consumption | 1.0A (Max) |
| Operating Temperature | -10°C ~ 40°C (14°F ~ 104°F) |
| Storage Temperature | -40°C ~ 60°C (-40°F ~ 140°F) |
| MTBF | ≥30000 hours |

| | |
|-------------------|-----------------------|
| Power Consumption | 12W (Max) |
| Size | 169mm x 142mm x 164mm |
| Net Weight | 1.35Kg (3.0lb) |

About VISSONIC Electronics Limited

Our mission is to develop and manufacture the most comprehensive and innovative audio visual products for our clients. We provide the best performance/price ratio products because it could give you satisfaction just from the time you use them, we believe the good design with cutting edge technology on products will provide value to all our partners and end users. Listen to your demands, we fulfill it.



4/F, Building G7, No. 31 Kefeng Road, Huangpu district, Guangzhou, China

• Tel: +86-020-82515140 • E-mail: info@vissonic.com

@2024 VISSONIC Electronics Ltd. all rights reserved.